

# Addendum for Serenity™ Shades, Cascade Shades and for Roller Shades and Cassette Valance Installation Guides

GUIDE 468348 / GUIDE 468116 / GUIDE 529388 / BTG CLASROL-TRIL\_0810

The following instructions replace a step near the end of each guide :  
“Mounting the Tie-Down Safety Device”  
or “Securing the chain loop”

## Improved Safety Tie-Down Tension Mechanism

Our new safety tie-down device has been created to comply with new and improved child safety laws. **This mechanism must be attached to the surrounding wall or frame for the blinds to operate correctly.**

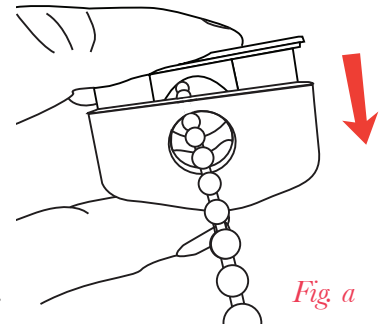


Fig a

1. Compress the tension device and slide it all the way down the chain (fig a).

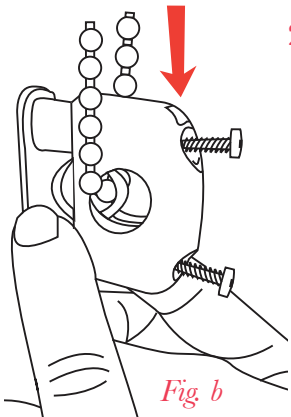


Fig b

2. Insert a 2” screw into each hole, then position the device on the wall or moulding, pulling down slightly to ensure proper tension (fig b). The chain should be taut on both sides.

3. Compress the tension springs by pushing the unit towards the surface on which it will be mounted. Use a screwdriver and the screws provided to install the tension device (fig c).

4. Final Check: Ensure that the chain can move freely through the tie-down device.

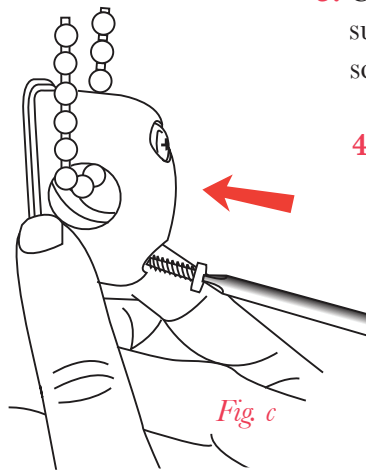


Fig c

**Note:** Use appropriate wall anchors if necessary.

The tension mechanism pictured above replaces the following device:



For more safety information: 1-866-662-0666  
[www.healthcanada.gc.ca/blindcords](http://www.healthcanada.gc.ca/blindcords)